




SELECTA AL

DOUBLE HEAD CUTTING OFF MC

SELECTA AL

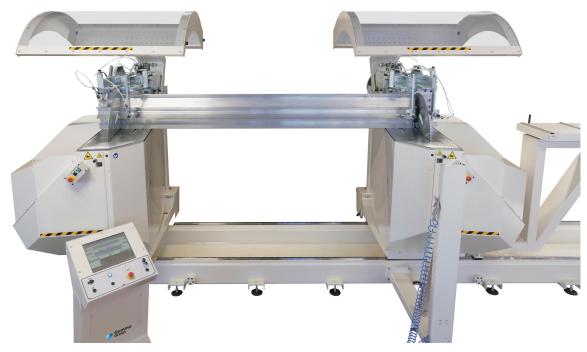

- Double head cutting off machine with a fixed sawing head on the left and one movable on the right side. Automatic positioning of the movable head.
- Rotation and tilting of both blades for compound cuts
- Electronic pivoting of the head inwards/outwards range 22,5° 90° 140°.
 Electronic tilting of the head range 90° 45°.
- Lubrication by micro-drop oil

- Brushless motor for axe positioning managed by servodrive.
- Numerical control with 3 positioning axes of the latest generation integrated in the function of a personal computer with 10,4" colour display TOUCH SCREEN.
- Software HICAM 2 for creating and controlling, highly ergonomic and of easiest use.
- Possibility of tele-assistance via internet. Pc with Windows 10 + wifi.

STANDARD EQUIPMENT

Nr. 2 TCT Saw Blades 1050mm Safe guards on the cutting area Nr. 4 Vertical pneumatic clamps Nr. 2 Horizontal clamps Micro drop oil lubrication Movable side support Pneumatic central support Air filter

OPTIONALS

TCT Saw Blade D.10500mm (spare) Label printer Motorized belt conveyor (6 mt)

SELECTA AL

GENERAL SPECIFICATIONS

Blade diameter: 1050 mm

Spindle diameter: 30 mm

Number of blade revs: 2760 giri/1' r.p.m.

Cutting speed: 72 m/sec

Advancement speed: adjustable

Minimum cutting length (between two blades): 750 mm

Maximum cutting length (between two blades): 6000 mm

Air consumption for cycle: 32 Nl.

Cutting angles : $22.5^{\circ} \div 140^{\circ}$ Rotation / $90 \div 45$ Inclination

Working pressure: 7 bar

Motor power: 50 Hz / 15 kW

	PROFILO: capacità taglio (mm) PROFILE: cutting capacity (mm)		
90°	340x340	700x245 / 500x300	
45°	260x260	700x175 / 500x210	

And the state of t	-	kg	
mm	kW	kg	mm
1050	15	5000	10650x2700x3000



Gemma Group

